

---

# PyTistory Documentation

*0.0.2*

**Jeong Ukjae**

**2019 01 19**



---

## Contents

---

<b>1</b>		<b>3</b>
1.1	.....	3
1.2	Blog API .....	5
1.3	Post API .....	7
1.4	Category API .....	11
1.5	Comment API .....	12
1.6	Guestbook API .....	15
<b>2</b>		<b>19</b>



[PyTistory](#) [API](#) [Python](#) [API](#) [API](#) [Client-side flow](#) .



## 1.1


### 1.1.1

pytistory pip .

```
$ pip install pytistory
```

### 1.1.2

, API OAuth . API client\_id . API , .

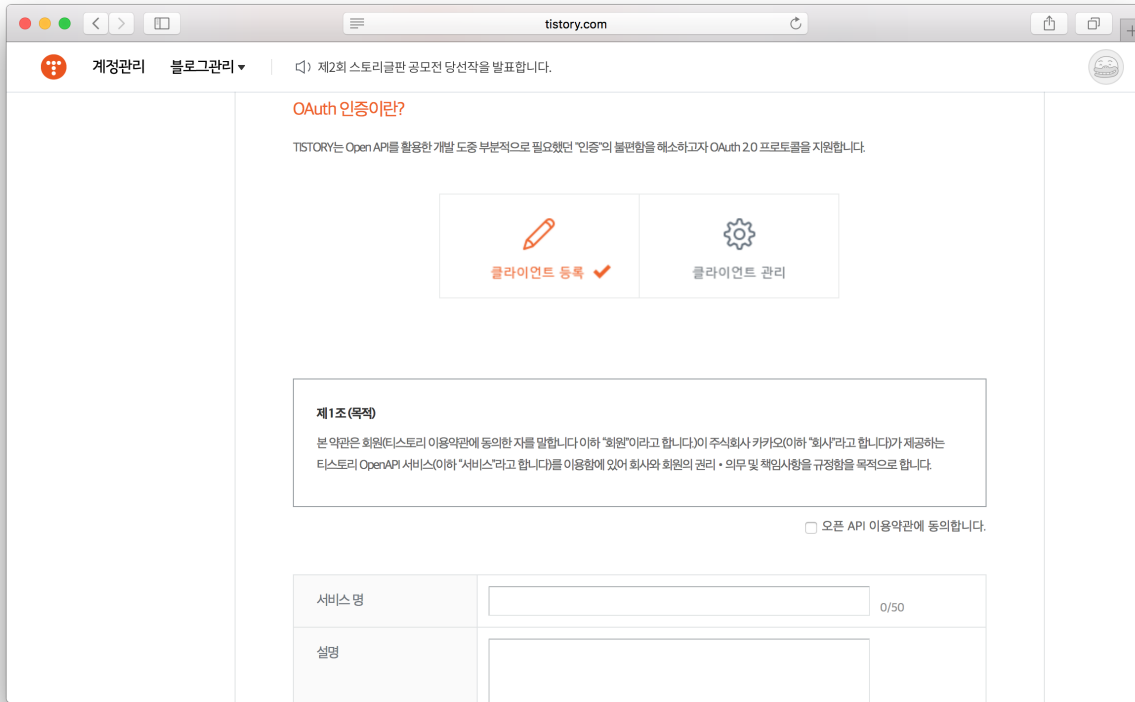

, Callback .

PC , Callback http://0.0.0.0:5000/callback . ., / .

### 1.1.3

- configure access\_token
- configure client\_id, tistory\_id, tistory\_password
- configure file\_name
- 
- (~/.pytistory/credentials.ini)

., client id file\_name , client\_id .

access\_token , access\_token .

#### Access Token

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure(
    access_token='some-example-access-token')
```



```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure(
    client_id='some-example-client-id',
    tistory_id='some-example-tistory-id',
    tistory_password='some-example-tistory-password')
```

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure(
    file_name='./some/path/to/credentials.ini')
```

ini(Initialization) .

```
[pytistory]
client_id=some-client-id
tistory_id=some-tistory-id
tistory_password=some-tistory-password
```

```
export PYTISTORY_CLIENT_ID=some-example-client-id
export PYTISTORY_TISTORY_ID=some-example-tistory-id
export PYTISTORY_TISTORY_PASSWORD=some-example-tistory-password
```

## 1.2 Blog API

### 1.2.1 Blog

API. API .

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.blog.info()
```

```
{
  "status": "200",
  "id": "blogtest_080@hanmail.net",
  "item": [
    {
      "url": "http://oauth.tistory.com",
      "secondaryUrl": "http://",
      "nickname": "Tistory API",
      "title": " , Tistory OAuth API !",
      "description": "",
      "default": "Y",
      "blogIconUrl":
        "http://il.daumcdn.net/cfs.tistory/blog/79/795307/index.gif",
      "faviconUrl":
        "http://il.daumcdn.net/cfs.tistory/blog/79/795307/index.ico",
      "profileThumbnailImageUrl":
        "http://cfile1.uf.tistory.com/R106x0/1851DB584DAF942950AF29",
      "profileImageUrl":
        "http://cfile1.uf.tistory.com/R106x0/1851DB584DAF942950AF29",
      "statistics": {
        "post": "3",
        "comment": "0",
        "trackback": "0",
        "guestbook": "0",
        "invitation": "0"
      }
    },
    {
      "url": "http://oauth2.tistory.com",
      "secondaryUrl": "http://",
      "nickname": "Tistory API",
      "title": " ",
      "description": "",
      "default": "N",
      "blogIconUrl":
        "http://il.daumcdn.net/cfs.tistory/blog/79/795308/index.gif",
      "faviconUrl":
        "http://il.daumcdn.net/cfs.tistory/blog/79/795308/index.ico",
      "profileThumbnailImageUrl": "",
      "profileImageUrl": "",
      "blogId": "795308",
      "statistics": {
        "post": "0",
        "comment": "0",
        "trackback": "0",
        "guestbook": "0",
        "invitation": "0"
      }
    }
  ]
}
```

## 1.3 Post API

### 1.3.1

API. API API .

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.list(blog_name='oauth')
```

```
{
  "status": "200",
  "item": {
    "url": "http://oauth.tistory.com",
    "secondaryUrl": "",
    "page": "1",
    "count": "10",
    "totalCount": "4",
    "posts": {
      "post": [
        {
          "id": "4",
          "title": " OAuth Open API !",
          "postUrl": "http://oauth.tistory.com /4",
          "visibility": "0",
          "categoryId": "0",
          "comments": "6",
          "trackbacks": "0",
          "date": "1303796661"
        },
        {
          "id": "3",
          "title": "View ~",
          "postUrl": "http://oauth.tistory.com /3",
          "visibility": "3",
          "categoryId": "0",
          "comments": "0",
          "trackbacks": "0",
          "date": "1303372106"
        },
        {
          "id": "2",
          "title": "View .",
          "postUrl": "http://oauth.tistory.com /2",
          "visibility": "3",
          "categoryId": "0",
          "comments": "0",
          "trackbacks": "0",
          "date": "1303372007"
        },
        {
          "id": "1",
```

(continues on next page)

```

        "title": " OAuth2.0 API !",
        "postUrl": "http://oauth.tistory.com /1",
        "visibility": "0",
        "categoryId": "0",
        "comments": "0",
        "trackbacks": "0",
        "date": "1303352668"
    }
  ]
}
}
}
}

```

### 1.3.2

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.write("Post Title",
                                blog_name='sampleUrl',
                                visibility=1,
                                category=12,
                                content="Post Content",
                                tag=["Tag1", "Tag2"])

```

**title** . str.

**blog\_name** . None. str.

**target\_url** url. deprecated . None. str.

**visibility**

- 0:
- 1:
- 2:
- 3:

0.

**published** . ., None. datetime.datetime.

**category** , 0. . 0.

**content** , None str.

**slogan** . . None.

**tag** , None. list.

```
{
  "status": "200",
  "postId": "74",
  "url": "http://sampleUrl.tistory.com/74"
}
```

### 1.3.3

API. API API .

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.modify("Post Title",
                                1,
                                blog_name='sampleUrl',
                                visibility=1,
                                category=12,
                                content="Post Content",
                                tag=["Tag1", "Tag2"])
```

API, .

published ,int post\_id .

```
{
  "status": "200",
  "postId": "74",
  "url": "http://sampleUrl.tistory.com/74"
}
```

### 1.3.4

API. API API .

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.read(1, blog_name='sampleUrl')
```

blog\_name post\_id.

```
{
  "status": "200",
  "item": {
    "url": "http://oauth.tistory.com",
    "secondaryUrl": "",

```

(continues on next page)

()

```

    "id": "1",
    "title": " OAuth2.0 API !",
    "content":
      " Tistory API .<br><br> Third-party Developer <b>Tistory OAuth 2.0 API</b> .",
    "categoryId": "0",
    "postUrl": "http://oauth.tistory.com/1",
    "visibility": "0",
    "acceptComment": "1",
    "acceptTrackback": "1",
    "tags": {
      "tag": ["open", "api"]
    },
    "comments": "0",
    "trackbacks": "0",
    "date": "1303352668"
  }
}

```

### 1.3.5

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.attach('./path/to/uploading/file', blog_name='sampleUrl')

```

. .  
.

```

{
  "status": "200",
  "url": "http://cfile6.uf.tistory.com/image/1328CE504DB79F5932B13F",
  "replacer":
    "%5b%23%23_1N%7ccfile6.uf%401328CE504DB79F5932B13F%7cwidth%3d%500%+height%3d%
↪"300%7c_%23%23%5d"
}

```

### 1.3.6

API .

API. API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.post.delete(1, blog_name='sampleUrl')

```

```
.
.
{
  "status": "200"
}
```

## 1.4 Category API

### 1.4.1 Category

API. API API .

```
from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.category.list(blog_name='oauth')
```

```
.
{
  "status": "200",
  "item": {
    "url": "oauth",
    "secondaryUrl": "",
    "categories": {
      "category": [
        {
          "id": "403929",
          "name": "OAuth2.0 Athentication",
          "parent": "",
          "label": "OAuth2.0 Athentication",
          "entries": "0"
        },
        {
          "id": "403930",
          "name": "Blog API Series",
          "parent": "",
          "label": "Blog API Series",
          "entries": "0"
        },
        {
          "id": "403931",
          "name": "Post API Series",
          "parent": "",
          "label": "Post API Series",
          "entries": "0"
        },
        {
          "id": "403932",
          "name": "Category API Series",
          "parent": "",
```

(continues on next page)

```

        "label": "Category API Series",
        "entries": "0"
    },
    {
        "id": "403933",
        "name": "Comment API Series",
        "parent": "",
        "label": "Comment API Series",
        "entries": "0"
    },
    {
        "id": "403934",
        "name": "Guestbook API Series",
        "parent": "",
        "label": "Guestbook API Series",
        "entries": "0"
    }
]
}
}
}

```

## 1.5 Comment API

### 1.5.1

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.comment.list(4, blog_name='oauth')

```

```

{
  "status": "200",
  "item": {
    "url": "http://oauth.tistory.com/4",
    "secondaryUrl": "",
    "postId": "4",
    "totalCount": "3",
    "comments": {
      "comment": [
        {
          "id": "8176918",
          "date": "1303796711",
          "name": "",
          "parentId": "",
          "homepage": "http://someurl.com",
          "visibility": "2",
          "comment": " ."
        }
      ]
    }
  }
}

```

(continues on next page)



( )

```

    "open": "Y"
  },
  {
    "id": "8176923",
    "date": "1303796801",
    "name": "",
    "parentId": "",
    "homepage": "http://shesgone.com",
    "visibility": "2",
    "comment": "    ^_^",
    "open": "N"
  },
  {
    "id": "8176926",
    "date": "1303796900",
    "name": "Tistory API",
    "parentId": "8176918",
    "homepage": "http://oauth.tistory.com",
    "visibility": "2",
    "comment": "    .. !",
    "open": "Y"
  }
]
}
}
}

```

## 1.5.2

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.comment.newest(blog_name='oauth')

```

```

{
  "status": "200",
  "item": {
    "url": "http://oauth.tistory.com",
    "secondaryUrl": "",
    "comments": {
      "comment": [
        {
          "id": "8176926",
          "date": "1303796900",
          "postId": "4",
          "name": "Tistory API",
          "homepage": "http://oauth.tistory.com",
          "comment": "    .. !",
          "open": "Y",

```

(continues on next page)

```

    "link": "http://oauth.tistory.com/4#comment8176926"
  },
  {
    "id": "8176923",
    "date": "1303796801",
    "postId": "4",
    "name": " ",
    "homepage": "http://shesgone.com",
    "comment": " ^_^",
    "open": "N",
    "link": "http://oauth.tistory.com/4#comment8176923"
  },
  {
    "id": "8176918",
    "date": "1303796711",
    "postId": "4",
    "name": "",
    "homepage": "http://someurl.com",
    "comment": " .",
    "open": "Y",
    "link": "http://oauth.tistory.com/4#comment8176918"
  }
]
}
}
}

```

### 1.5.3

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.comment.write(4,
                                   'some-comment-content',
                                   blog_name='oauth',
                                   parent_id=12,
                                   secret=1)

```

post\_id .parent\_id optional.secret 1 .

```

{
  "status": "200",
  "commentUrl": "http://oauth.tistory.com/4#comment8176976",
  "result": "OK"
}

```

### 1.5.4

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.comment.modify(4,
                                    8176976,
                                    'some-comment-content',
                                    blog_name='oauth',
                                    parent_id=12)

```

```
, id(post_id) id(comment_id), . secret .
```

```

{
  "status": "200",
  "commentUrl": "http://oauth.tistory.com/4#comment8176976",
  "result": "OK"
}

```

## 1.5.5

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.comment.delete(4,
                                    8176976,
                                    blog_name='oauth')

```

```
, id(post_id) id(comment_id), (blog_name).
```

```

{
  "status": "200"
}

```

## 1.6 Guestbook API

### 1.6.1

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.guestbook.list(blog_name='oauth')

```

```

{
  "status": "200",
  "item": {
    "url": "http://oauth.tistory.com",
    "secondaryUrl": "",
    "page": "1",
    "totalCount": "2",
    "guestbooks": {
      "guestbook": [
        {
          "id": "8177011",
          "date": "1303798898",
          "name": "",
          "homepage": "http://wrongway.com",
          "comment": "...",
          "open": "Y",
          "replies": {
            "reply": {
              "id": "8177015",
              "date": "1303799030",
              "name": "Tistory API",
              "parentId": "8177011",
              "homepage": "http://oauth.tistory.com",
              "comment": "",
              "open": "Y"
            }
          }
        },
        {
          "id": "8177008",
          "date": "1303798795",
          "name": "",
          "homepage": "http://somedevloper.com",
          "comment": " API !",
          "open": "Y",
          "replies": ""
        }
      ]
    }
  }
}

```

## 1.6.2

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.guestbook.write(" ~ :D", blog_name='oauth', parent_id=13,
↪secret=1)

```

secret 1 .

```

{
  "status": "200",
  "guestbookUrl": "http://oauth.tistory.com/guestbook",
  "result": "OK"
}

```

### 1.6.3

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.guestbook.modify(13, "[ ] ~ :D", blog_name='oauth', parent_
↪id=13, secret=1)

```

secret 1 .

```

{
  "status": "200",
  "guestbookUrl": "http://oauth.tistory.com/guestbook",
  "result": "OK"
}

```

### 1.6.4

API. API API .

```

from pytistory import PyTistory

pytistory = PyTistory()
pytistory.configure()

response = pytistory.guestbook.delete(13, blog_name='oauth')

```

id .

```

{
  "status": "200"
}

```



## CHAPTER 2

---

---

. Contribution . , PR Issue .